

OR-3200UV Pro (RicohG5x12)

3D 立体磁悬浮肌理打印机 3D texture relief maglev printer

3D肌理
3D texture
多层印刷分层技术
Multi-layer relief printing technology




8头白彩-1mm肌理效果: 6 m²/h, 哑油、烫金光油、亮油自由切换

1mm Texture effect: 6 sqm/h, matte oil, hot golden oil, bright oil can be freely switched




最大支持12个喷头的排列配置
Supports up to 12heads arrangement configurations




前置气胀轴收料系统, 后双辊放料更平稳
Front inflatable shaft feeding system, rear double roller feeding is smoother




喷墨系统: 坚固的结构设计, 确保喷墨系统稳定出墨
Inkjet system: sturdy structural design ensures stable ink output and increases printing stability



左右喷头防撞装置
Left and right head anti-collision device



THK静音双导轨+直线电机+磁栅
THK silent dual rail+magnev+ magnetic grid



采用H型钢结构支架
Using H-shaped steel structure support,the printing process is more stable

技术参数		TECHNICAL PARAMETER
型号 Model	OR-3200UV Pro	
打印头 Print head	RicohG5 (≤12heads)	
颜色 Color	W / CMYK / LC / LM / V1 / V2	
打印速度 Printing speed	肌理 texture	6 m²/h (8头白彩速度)
打印模式 Print mode	压电式喷墨打印 Piezoelectric inkjet printing	
介质 Medium	宽幅 Width	3220 mm
	厚度 Thickness	1 mm
	重量 Weight	200 kg, 气胀轴收料装置 Inflatable shaft feeding device
打印宽幅 Print width	3200 mm	
墨盒 Ink cartridge	种类 Type	肌理画专用墨 Texture specific ink
	容量 Capacity	连供系统 (1.5升墨桶) Continuous supply system (1.5L ink tank)
固化单元 Curing unit	光固化水冷UV LED灯 UV cured water-cooled UV LED lamp	
打印精度 Accuracy	1200 dpi	
电压 Voltage	AC 220V ± 10%, 50/60 HZ 5500W	
软件 Software	Rinprint UV	
机器尺寸 / 重量 Machine size/weight	5410x1050x1620 mm / 1200 kg	
包装尺寸 / 重量 Packaging size/weight	5650x1130x1870 mm / 1350 kg	
环境 Environment	开机模式 Power on mode	温度 Temperature: 15℃ ~ 32℃ / 湿度 Humidity: 35 ~ 80% (无凝结 No condensation)
	关闭模式 Close mode	温度 Temperature: 5℃ ~ 40℃ / 湿度 Humidity: 20 ~ 80% (无凝结 No condensation)
附件 Accessories	数据线, 压纸片, 用户手册, 废墨盒, 墨盒, RIP 软件等 Data cable, user manual, waste ink cartridges, ink cartridges, RIP software, etc	

OR-5806E UV (Epsoni3200-U1x6)

3D 立体肌理浮雕画导带机 3D texture relief painting hybrid printer

3D肌理
3D texture
多层印刷分层技术
Multi-layer relief printing technology




1mm肌理效果: 5 m²/h, 哑油、烫金光油、亮油自由切换

1mm Texture effect: 5 sqm/h, matte oil, hot golden oil, bright oil can be freely switched



除静电装置
Static electricity removal device




喷头底板加热单元
Heating unit for head base plate




负压供墨系统
Negative pressure ink supply system



自动保湿清洗组件+独立刮片
Automatic moisturizing cleaning component+independent scraper



高强度导带+前后压料杆
High strength tape guide+front and rear pressure rod



THK高精度静音双导轨
THK high-precision silent dual rail

技术参数		TECHNICAL PARAMETER
打印头 Print head	6xEpsoni3200-U1	
颜色 Color	W / CMYK / Lc / Lm / Lk / Lik / V1 / V2	
打印速度 Printing speed	肌理 texture	5 m²/h
打印模式 Print mode	压电式喷墨打印 Piezoelectric inkjet printing	
介质 Medium	宽幅 Width	1820 mm
	厚度 Thickness	≤3 mm
	重量 Weight	60 kg
打印宽幅 Print width	1800 mm	
墨盒 Ink cartridge	种类 Type	肌理画专用墨 Texture specific ink
	容量 Capacity	连供系统 (1.5升墨桶) Continuous supply system (1.5L ink tank)
固化单元 Curing unit	光固化水冷UV LED灯 UV cured water-cooled UV LED lamp	
打印精度 Accuracy	2400 dpi	
电压 Voltage	AC 220V ± 10%, 50/60 HZ, 3500W	
软件 Software	Rinprint UV	
机器尺寸 / 重量 Machine size/weight	3550x1760x1820 mm / 850 kg	
包装尺寸 / 重量 Packaging size/weight	3900x1660x1880 mm / 950 kg	
环境 Environment	开机模式 Power on mode	温度 Temperature: 15℃ ~ 32℃ / 湿度 Humidity: 35 ~ 80% (无凝结 No condensation)
	关闭模式 Close mode	温度 Temperature: 5℃ ~ 40℃ / 湿度 Humidity: 20 ~ 80% (无凝结 No condensation)
附件 Accessories	数据线, 压纸片, 用户手册, 废墨盒, 墨盒, RIP 软件等 Data cable, user manual, waste ink cartridges, ink cartridges, RIP software, etc	



南京欧瑞卡数码科技有限公司 Nanjing ORIC Digital Technology Co., Ltd.

地址 Add : 江苏省南京市溧水区和凤工业园和高路116号 Add: No.116, Hegao Road, Hefeng Industrial Park, Lishui District, Nanjing

电话 Tel : 025-69970281/69970282 网站 Web : www.oric-systems.cn

3D肌理浮雕打印机系列

3D Texture Printer Series



< 龙门铣重型机架加工车间 Gantry milling >

< 喷漆加工车间 Spray plastic processing >

< 机加工车间 Machined processing >


< 钣金折弯加工车间 Sheet metal processing >

喷墨设备一站式制造商


One stop manufacturer of inkjet equipment

OR-3200H UV (RicohG5x16)

3D立体肌理高速墙布磁悬浮导带机
3D texture high speed wall fabric maglev hybrid printer

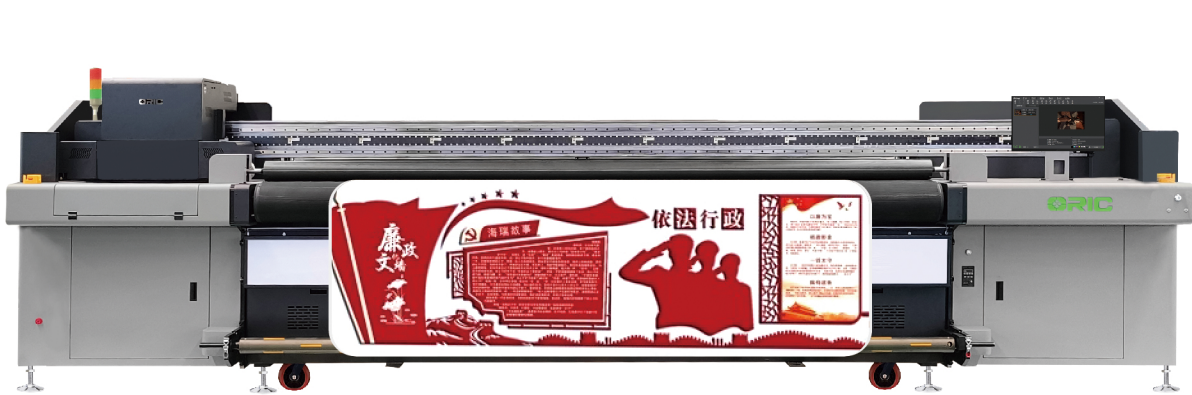


1mm肌理效果: **10** m²/h, 支持3.2米幅面墙布、文化墙及不同规格材料打印方案
1mm Texture effect: **10** sqm/h, Support printing solutions for 3.2-meter wall coverings, cultural walls, and materials of different specifications

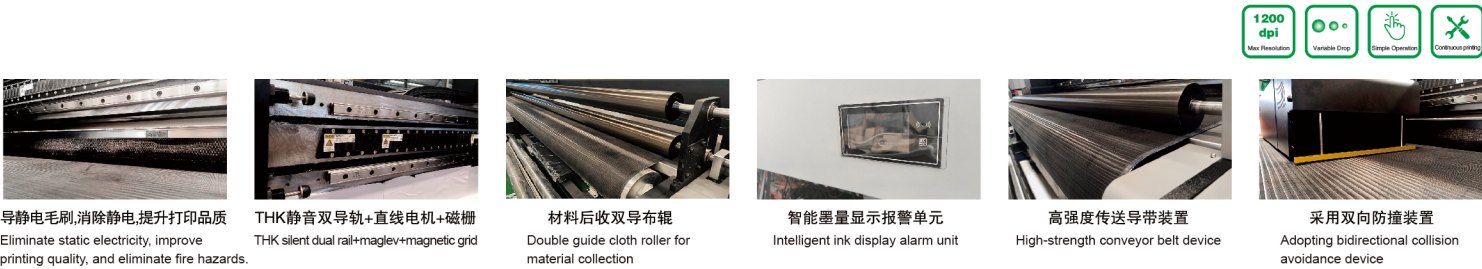


技术参数		TECHNICAL PARAMETER
型号 Model	OR-3200H UV	
打印头 Print head	RicohG5x16 (支持8 / 12 / 16 / 20头配置 support 8 / 12 / 16 / 20 head)	
颜色 Color	W / CMYK / LC / LM / V1 / V2	
打印速度 Printing speed	1mm texture -- 10 m²/h (16头白彩配置)	
打印模式 Print mode	压电式喷墨打印 Piezoelectric inkjet printing	
介质 Medium	宽幅 Width	3220 mm
	厚度 Thickness	≤3 mm
	重量 Weight	200 kg收放料, 标配前后气胀轴 200kg material feeding and unloading, equipped with front and rear inflation shafts as standard
打印宽幅 Print width	3200 mm	
墨盒 Ink cartridge	种类 Type	肌理画专用墨 Texture specific ink
	容量 Capacity	连供系统 (1.5/3升墨桶) Continuous supply system (1.5/3L ink tank)
固化单元 Curing unit	光固化水冷UV LED灯 UV cured water-cooled UV LED lamp	
打印精度 Accuracy	1200 dpi	
电压 Voltage	AC 220V ± 10%, 50/60 HZ 6500W	
软件 Software	Rinprint UV	
机器尺寸 / 重量 Machine size/weight	5720x1840x1680 mm / 1800 kg	
包装尺寸 / 重量 Packaging size/weight	5910x1930x1940 mm / 2000 kg	

OR-1800H UV (Epsoni3200-U1x8)

3D立体肌理浮雕画导带机 3D texture hybrid printer

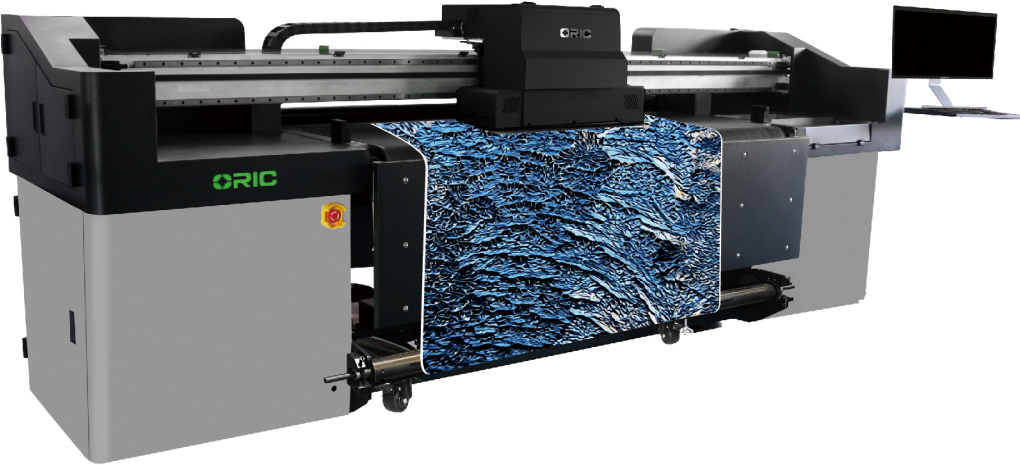


1mm肌理效果: **7** m²/h, 哑油、烫金光油、亮油自由切换
Texture effect: **7** sqm/h, matte oil, hot golden oil, bright oil can be freely switched

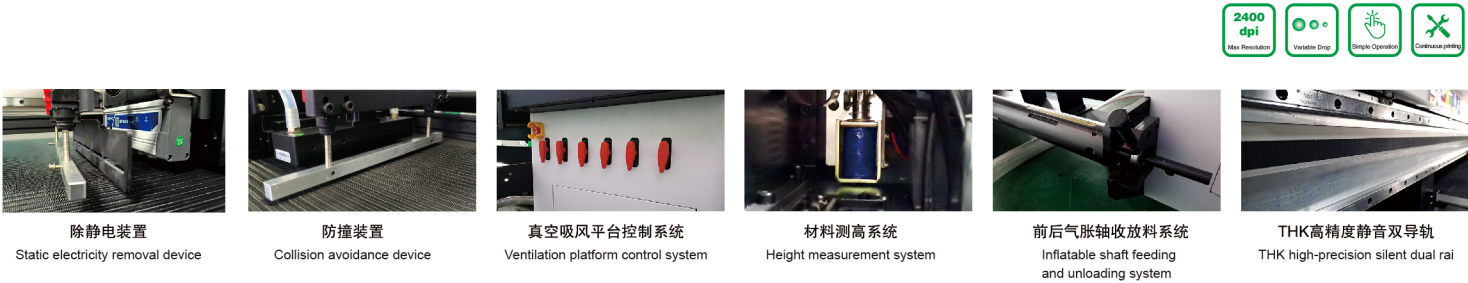


技术参数			TECHNICAL PARAMETER
型号 Model		OR-1800H UV	
打印头 Print head		8xEpsonI3200-U1	
颜色 Color		W / CMYK / LC / LM / V1 / V2	
打印速度 Printing speed	肌理 texture	7 m²/h (8头白彩配置)	
打印模式 Print mode		压电式喷墨打印 Piezoelectric inkjet printing	
介质 Medium	宽幅 Width	1820 mm	
	厚度 Thickness	≤3 mm	
	重量 Weight	200 kg收放料, 标配前后气胀轴 200kg material feeding and unloading, equipped with front and rear inflation shafts as standard	
打印宽幅 Print width		1800 mm	
墨盒 Ink cartridge	种类 Type	肌理画专用墨 Texture specific ink	
	容量 Capacity	连供系统 (1.5升墨桶) Continuous supply system (1.5L ink tank)	
固化单元 Curing unit		光固化水冷UV LED灯 UV cured water-cooled UV LED lamp	
打印精度 Accuracy		2400 dpi	
电压 Voltage		AC 220V ± 10%, 50/60 HZ 3500W	
软件 Software		Rinprint UV	
机器尺寸 / 重量 Machine size/weight		3630x1132x1400 mm(无支架 stentless) / 1000 kg	
包装尺寸 / 重量 Packaging size/weight		3860x1140x1610 mm / 1150 kg	

OR-5804E UV (Epsoni3200-U1x4)

3D立体肌理浮雕画导带机 3D texture relief painting hybrid printer



1mm肌理效果: **4** m²/h, 哑油、烫金光油、亮油自由切换
Texture effect: **4** sqm/h, matte oil, hot golden oil, bright oil can be freely switched

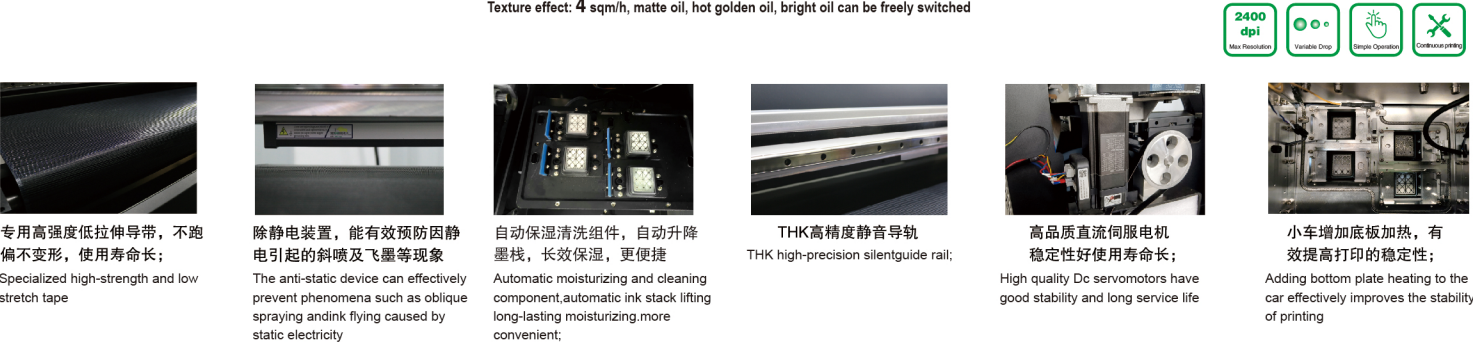

技术参数			TECHNICAL PARAMETER
型号 Model		OR-5804E UV	
打印头 Print head		4xEpsoni3200-U1	
颜色 Color		W+CMYK+V	
打印速度 Printing speed	肌理 texture	4 m²/h	
打印模式 Print mode		压电式喷墨打印 Piezoelectric inkjet printing	
介质 Medium	宽幅 Width	1820 mm	
	厚度 Thickness	≤3 mm	
	重量 Weight	60 kg	
打印宽幅 Print width		1800 mm	
墨盒 Ink cartridge	种类 Type	肌理画专用墨 Texture specific ink	
	容量 Capacity	连供系统 (1.5升墨桶) Continuous supply system (1.5L ink tank)	
固化单元 Curing unit		光固化水冷UV LED灯 UV cured water-cooled UV LED lamp	
打印精度 Accuracy		2400 dpi	
电压 Voltage		AC 220V ± 10%, 50/60 HZ 3500W	
软件 Software		Rinprint UV	
机器尺寸 / 重量 Machine size/weight		3400 x 1050 x 1592 mm / 450 kg	
包装尺寸 / 重量 Packaging size/weight		3550 x 1130 x 1740 mm + 585 x 450 x 385 mm(UV水箱 BOX) / 520 kg	